


CABLE / WIRE

Center Pivot Cable / Wire

RainTEC® Span Cable

RainTEC® Span Cable			
NI Part #	Size	Wt/M ft	Type
25005	10/4-14/7	525 lbs.	11-Conductor Shielded Span Cable
25002	10/4-14/6	500 lbs.	10-Conductor Shielded Span Cable
25054	12/4-14/6	400 lbs.	10-Conductor Shielded Span Cable

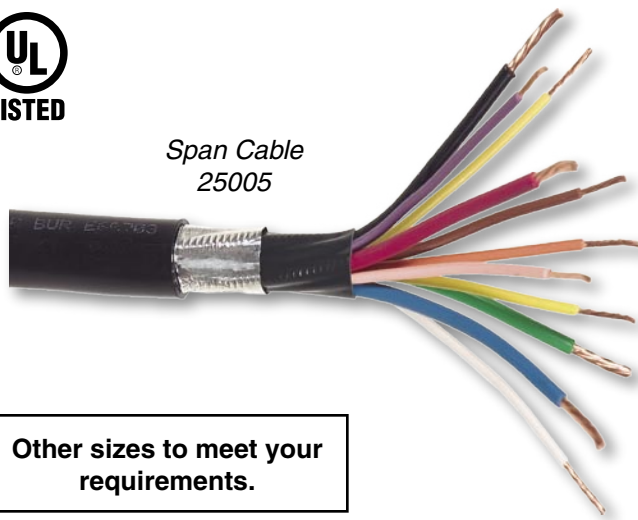


Span Cable
25005

E

Other sizes to meet your requirements.

RainTEC® Motor Drop

RainTEC® Motor Drop Cable			
NI Part #	Size	Wt/M ft	Type
98240	14/4	250 lbs.	4-Conductor Motor Drop, Shielded less Drain

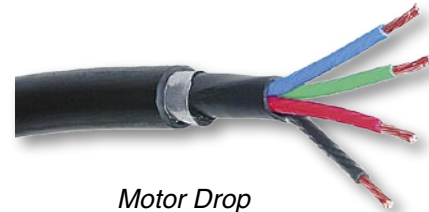

Motor Drop
98240

Guidance Wire

Guidance Wire			
NI Part #	Size	Wt/M ft	Type
98215	14/2	140 lbs.	Guidance Wire, Gopher Proof, Stainless
98213	14/1	69 lbs.	Guidance Wire, Gopher Proof, Stainless

Quadruplexed Aluminum Direct Burial Wire

Reduced neutral (UL).
Specify length when ordering.



NI Part #	Phase	Neutral	Wt/M ft	Name	Description
98226	4	4	258#	Tulsa	Quad #4 w/ Full Neutral
98223	2	4	346#	Dyke	Quad #2 w/ Reduced Neutral
98227	1/0	2	541#	Notre Dame	Quad #1/0 w/ Reduced Neutral
98228	2/0	1	664#	Syracuse	Quad #2/0 w/ Reduced Neutral
98225	4/0	2/0	979#	Wake Forest	Quad #4/0 w/ Reduced Neutral
98219				Slippery Rock	Quad 350 MCM w/ Reduced Neutral

Other sizes also available.

Please specify length when ordering.

If you need more information or want to purchase cable for applications not listed in this catalog, give our sales office a call.